

WFI // with Mini-Fit plug // -40...125 °C



WFI

Your advantages

Type	WFI
	<ul style="list-style-type: none"> • Cost-effective electrical connection through Mini-Fit connector • Efficient control due to very short response times • Application-specific installation lengths and screw-in threads possible • High reliability due to special internal construction • Measured values reproducible for years due to very low long-term drift

Technical data	
Type	Temperature sensor with Mini-Fit plug
Measuring range	-40...125 °C
Measuring medium	Water and aqueous liquids, non-aggressive gases
Immersion tube length	15 mm or 19.5 mm
Immersion tube diameter	3.2 mm
Process connection	G½
Nominal pressure	PN 25
Medium temperature	-40...125 °C
Ambient temperature	-40...105 °C
Storage temperature	-25...70 °C
Degree of protection according to EN 60529	IP30

Electrical data	
Measuring element	1 x Pt1000 / 2-wire 1 x NTC 5k
Measuring insert	Not interchangeable
Accuracy	Class B / $\pm(0.30 \text{ K} + 0.005 \times t)$ NTC 5k $\pm 0.2^\circ\text{C}$ in the range 0... +70°C (B25/85= 3977 K $\pm 0.3\%$)
Electrical connection	Mini-Fit plug, 2-pole

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47


Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://sika.nt-rt.ru/> || skx@nt-rt.ru

WFI

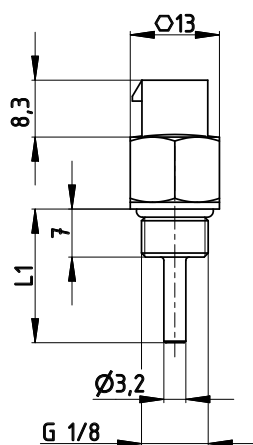

Materials

In contact with media

Process connection

Edelstahl 1.4571 / 1.4404

Protection tube

Edelstahl 1.4571 / 1.4404

Seal

EPDM; WRAS-, KTW-, W270 approval

Order code								
Type								
Resistance thermometer		SME8						
Diameter								
3.2 mm		32						
Material								
Stainless steel 1.4571 / 1.4404		0						
Sensor element								
1 x Pt1000 2-wire / Class B				P12				
1 x NTC 5k				N01				
Tauchrohrlänge L1								
15 mm					015			
19.5 mm					019			
Electrical connection								
Mini-Fit, 2-pole						X0		
Process connection d1*								
G $\frac{1}{8}$							M	
Example order number		SME8	32	0	P12	015	X0	M

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://sika.nt-rt.ru/> || skx@nt-rt.ru