

# Hand-Held Thermometer // with changeable sensor // -199.99...850 °C



MH 3750



UM RTD.2

## Your advantages

Type	MH 3750	UM RTD.2
	<ul style="list-style-type: none"> <li>• Excellent measuring accuracy</li> <li>• Optical and acoustic alarm</li> <li>• 2 integrated data logger functions</li> <li>• User-defined characteristic curve (50 value pairs)</li> <li>• Real time clock with date / month / year indication</li> <li>• Free scaleable analogue output</li> </ul>	<ul style="list-style-type: none"> <li>• Excellent measuring accuracy</li> <li>• Data memory</li> <li>• 2-, 3- and 4-wire-connection possible</li> <li>• User-defined characteristic curve</li> <li>• Switchable measuring inputs</li> </ul>

## Technical data

Type	MH 3750	UM RTD.2
Measuring range / resolution	-199.99...199.99 °C / 0.01 °C 200.0...850.0 °C / 0.1 °C	-200.00...850.00 °C / 0.01 °C
Accuracy	±0.015 % of range ±1 digit	±0.012 % of reading ±1 digit + k
<b>Equipment</b>		
Input	Pt100	Switchable: Pt50, Pt100, Pt200, Pt500, Pt1000, Cu10, Cu50, Ni100, Ni120, Ni1000, 0...3600 Ω
Multi-conductor connection	4-wire	2- /3- /4-wire
Output	Analogue output 0...1 V, free scaleable	
<b>Measurement features</b>		
Data memory	Data memory Manual - 99 values Cyclic - 16 200 values Adjustable measuring interval 1 s...60 min	Data memory for 10 000 values

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Казахстан (772)734-952-31

Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

<https://sika.nt-rt.ru/> || [skx@nt-rt.ru](mailto:skx@nt-rt.ru)

General data		
<b>Type</b>	MH 3750	UM RTD.2
<b>Units</b>	°C / °F	°C / °F or user-defined
<b>Sensor connection</b>	1x mini-DIN-socket, 4-pole	4x 4 mm-socket 1x 4-pole M8 plug
<b>Linearisation</b>	Offset and gradient Characteristic curve according to DIN EN 60751 User-defined characteristic curve	Offset Characteristic curve according to DIN EN 60751 User-defined characteristic curve
<b>Power supply</b>	Battery supply, 9 V block battery or power supply (optional)	Battery supply, 4x 1.5 V AA or Accu incl. power supply (optional)
<b>PC Interface</b>	Via galvanically isolated interface converter (accessory) directly to RS232 or USB interface	Mini-USB, galvanically isolated / short-circuit proof
Display		
<b>Display</b>	2 x 4½ digit LCD	Multi-functional LCD, 6 digit, with illumination
<b>Functions</b>	Hold, Auto-Off Alarm and time / date Min-/max alarm signal via display, interface and buzzer, Real time clock with year and date	
Housing		
<b>Features</b>	Shock-resistant ABS plastic, foil keyboard, clear window, integrated bracket	Shock-resistant ABS plastic with protective cover
<b>Dimensions</b> (H x B x T)	142 x 71 x 26 mm	157 x 85 x 45 mm
<b>Weight</b>	Approx. 155 g	Approx. 306 g

Order code		
Type		Order number
<b>MH 3750</b>		EME8GMH3750000
<b>UM RTD.2</b>		EME8A0UMRTD020

Order code		
Accessories		Order number
<b>Transport case</b>	MH 3750	EME8GKK3100000
<b>Transport case (with shaped foam insert)</b>	MH 3750 / UM RTD.2	EME8GKK3600001
<b>Plug connector 4 mm red</b>	UM RTD.2	EME8A0SKLS40RT
<b>Plug connector 4 mm black</b>	UM RTD.2	EME8A0SKLS40SW
<b>Internal battery pack set incl. maine adapter</b>	UM RTD.2	EME8A0AN601100
<b>Battery pack</b>	MH 3750	EME8GAK9V00000
<b>Sensor-specific linearization for UM RTD.2 + TF-Sensor (-30...100 °C)</b>	UM RTD.2	EKTFLINUMRTD100
<b>Sensor-specific linearization for UM RTD.2 + TF-Sensor (RT...250 °C)</b>	UM RTD.2	EKTFLINUMRTD250
<b>Sensor-specific linearization for UM RTD.2 + TF-Sensor (251...500 °C)</b>	UM RTD.2	EKTFLINUMRTD500
<b>Sensor-specific linearization for UM RTD.2 + TF-Sensor (501...650 °C)</b>	UM RTD.2	EKTFLINUMRTD650
<b>Fühlerspezifische Linearisierung for MH 3750 + Pt100-Fühler</b>	MH 3750	EKTF-LINMH3750
<b>Software EBS20M (20 measuring channels)</b>	MH 3750	EME8EBS20M00KA
<b>Software Soft3050 (add-on for logger and alarm)</b>	MH 3750	EME8GSOFT305KA
<b>DAkKS-Certificate (4 points up to 500 °C)</b>	MH 3750 / UM RTD.2	EKTMK00000000D
<b>SIKA works certificate (4 points up to 500 °C)</b>	MH 3750 / UM RTD.2	EKTMK00000000W

# Hand-Held Thermometer // Temperature sensors



Temperature sensor suitable for MH 3710 and MH 3750

Pt100	Temperature range	L [mm]	D [mm]	Order number
GTF401 Standard sensor	-50...400 °C	150	∅ 3	EME8GTF401000G
GES401 Spike sensor	-50...400 °C	150	∅ 3	EME8GES401000G
GOF401 Surface sensor	-50...400 °C	300	∅ 3 (head = ∅ 4)	EME8GOF401000G
GLF401 Air / gas sensor	-50...400 °C	100	∅ 3 (head = ∅ 6)	EME8GLF401000G



Temperature sensor suitable for UM RTD.2

Pt100	Temperature range	L [mm]	D [mm]	Sensitive length [mm]	Order number
TF 255-3-300	-55...255 °C	300	∅ 3	2	W033P413000H3002
TF 650-3-300	-35...650 °C	300	∅ 3	5	W034P413000H3002
TF 650-6-300	-35...650 °C	300	∅ 6	5	W064P413000H3002

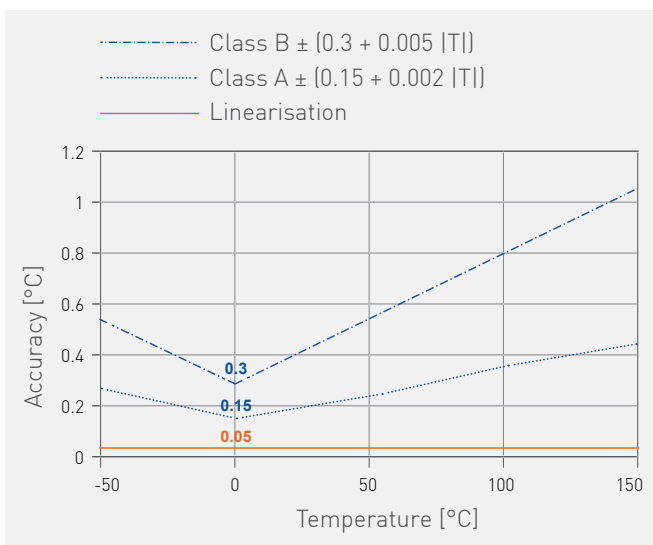

Архангельск (8182)63-90-72  
 Астана (7172)727-132  
 Астрахань (8512)99-46-04  
 Барнаул (3852)73-04-60  
 Белгород (4722)40-23-64  
 Брянск (4832)59-03-52  
 Владивосток (423)249-28-31  
 Волгоград (844)278-03-48  
 Вологда (8172)26-41-59  
 Воронеж (473)204-51-73  
 Екатеринбург (343)384-55-89  
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
 Иркутск (395)279-98-46  
 Казань (843)206-01-48  
 Калининград (4012)72-03-81  
 Калуга (4842)92-23-67  
 Кемерово (3842)65-04-62  
 Киров (8332)68-02-04  
 Красноярск (861)203-40-90  
 Красноярск (391)204-63-61  
 Курск (4712)77-13-04  
 Липецк (4742)52-20-81  
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
 Москва (495)268-04-70  
 Мурманск (8152)59-64-93  
 Набережные Челны (8552)20-53-41  
 Нижний Новгород (831)429-08-12  
 Новокузнецк (3843)20-46-81  
 Новосибирск (383)227-86-73  
 Омск (3812)21-46-40  
 Оренбург (4862)44-53-42  
 Оренбург (3532)37-68-04  
 Пенза (8412)22-31-16  
 Казахстан (772)734-952-31

Пермь (342)205-81-47  
 Ростов-на-Дону (863)308-18-15  
 Рязань (4912)46-61-64  
 Самара (846)206-03-16  
 Санкт-Петербург (812)309-46-40  
 Саратов (845)249-38-78  
 Севастополь (8692)22-31-93  
 Симферополь (3652)67-13-56  
 Смоленск (4812)29-41-54  
 Сочи (862)225-72-31  
 Ставрополь (8652)20-65-13  
 Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35  
 Тверь (4822)63-31-35  
 Томск (3822)98-41-53  
 Тула (4872)74-02-29  
 Тюмень (3452)66-21-18  
 Ульяновск (8422)24-23-59  
 Уфа (347)229-48-12  
 Хабаровск (4212)92-98-04  
 Челябинск (351)202-03-61  
 Череповец (8202)49-02-64  
 Ярославль (4852)69-52-93